

COMPACT FEEDING LINE



MODEL	DEMAE 100/300	DEMAE 100/450	DEMAE 100/600	DEMAE 100/750	DEMAE 100/1000	DEMAE 100/1250	DEMAE 100/1500
Max width (mm)	300	450	600	750	1000	1250	1500
Max opening of rollers (mm)	10	10	10	10	10	10	10
Max feed section R = 500 Mpa 3000 mm ²	300 x 10	450 x 6.7	600 x 5	750 x 4	1000 x 3	1250 x 2.4	1500 x 2
Recommended min. thickness (mm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
∅ traction rollers (mm)	140	140	140	140	140	140	140
∅ straightening rollers (mm)	100	100	100	100	100	100	100
No. of motorized traction rollers	2	2	2	2	2	2	2
No. straightening rollers	8	8	8	8	8	8	8
No. straightening motorized rollers	4	4	4	4	4	4	4
Continuous speed (m/min)	60	60	60	60	60	60	60
Feed accuracy (mm)	± 0,05	± 0,05	± 0,05	± 0,05	± 0,05	± 0,05	± 0,05

Short "compact" feed line for unwinding, straightening and feeding in a single unit

Composed of the following machines and accessories:

- Motorized vertical decoiler with hydraulic expansion.
- Electronic speed variator.
- Hydraulic clamping arm.
- Joining frame between both machines.
- (OPTIONAL) Hydraulic loading coil cart.
- Compact straightener-feeder.
- Height elevation of the straightener-feeder.
- First loop introduction system
- Side and back safety fence.
- (OPTIONAL) Security barriers.

MOTORIZED DECOILER WITH HYDRAULIC EXPANSION

Machine built in cold-rolled, welded and stabilized tubular steel structure.

Easy to install and handle and with little maintenance.

Built with high quality materials and a careful manufacturing process that guarantees a long life to the machine and a total absence of problems.

- Central axis of treated steel.
- Steel mandrel, welded and stabilized.
- Coil fastening by means of 6 adjustable side arms depending on the width of the band.
- Hydraulic expansion of the mandrel driven by electro-hydraulic group

Inside diameter	508 /610 mm
Max outside diameter	1600-1800 mm
Max coil weight	5000-7500-10000-12500 Kg
Max coil width	from 300 to 1500 mm
Variable turning speed	2-12 rpm

HYDRAULIC CLAMPING ARM

With activation by hydraulic cylinder and electrohydraulic manoeuvre.

Built using a welded, stabilized and mechanized flame cutting structure. With a central axis in high resistance steel. The arm has a nylon-coated wheel with maintenance-free ball bearings, which improves rolling and prevents marks on the surface of the sheet metal.

The arm is adjustable, allowing us to easily place the arm in any position for alignment with different strip widths.

Max coil diameter	1800 mm
Min coil width	90 mm
Wheel diameter	200 mm

Connection cabinet and common electrical installation for both machines with the necessary auxiliary protection equipment for correct operation.

- General switch.
- Automatic-manual selector.
- Direction of rotation selector.
- Manual button.
- Emergency stop.
- Speed regulator by laser
- Electronic speed variator
- Loop excess control (Start-Stop) timer
- Programming terminal with color LCD touch screen.
- Programmable feed length up to 9999 mm
- Programmable speed in %
- Diagnosis and display of error messages.
- Function parameters.
- Operation in continuous manual and automatic mode

STRAIGHTENER – COMPACT FEEDER


Space saving system, designed in order to straighten and feed in a single unit

Easy to install and simple to program, the start-up of the EMAE Straighteners-Feeders can be carried out by the user company itself, quickly and safely.

The Motion-Drive electronic control system allows precise positioning of the strip in feeding processes with repetition of the same feed length.

- Robust construction and easy handling.
- Rollers and gears made of special treated and rectified steel with a surface hardness of 60-62 HRC.
- Main transmission through a "zero backlash" worm gear reducer.
- Transmission between rollers through precision spur gears, hardened and ground.
- Manual adjustment of the upper rollers by means of conical gears and threaded spindles.
- Micrometric reading of straightening penetration.
- Adjustable side guides at the entrance
- Support rollers at the entrance.
- Adjustable pneumatic system for pilot release and raising the group of upper rollers, to facilitate the introduction of the material and for work with dies with centering pilots
- System for introducing the first coil of the strip, made up of tilting elements, activated by pneumatic cylinders, which allows the material to slide easily towards the straightener-feeder without the need for the operator to manipulate the strap, thus avoiding unnecessary risks.
- Variable feeding height from 1150 to 1450 mm.
- 'Motion-Drive' digital servo-controller, for processes with repetition of the feed length.
- External encoder.

OPTIONAL : CUTTING AND WELDING SYSTEM BEGINNING AND END OF COIL

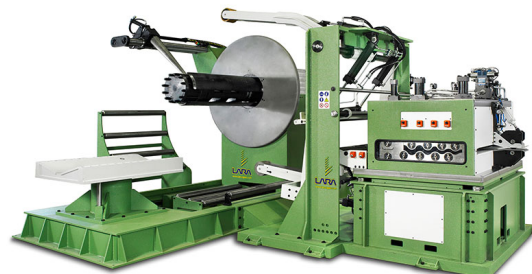

THE MANUFACTURER RESERVES THE RIGHT TO MAKE TECHNICAL MODIFICATIONS NECESSARY FOR THE PROPER FUNCTIONING OF THE MACHINES.